

OVERHEAD PRODUCTS INTRODUCTION

In 2006, DCD Design took on the Cable Spinning Equipment Company, and began producing the Lineman and Eagle cable lashers. In doing so, DCD took on a long history of quality and innovation.

These lashers were previously manufactured by Cable Spinning Equipment Company, Inc. in New London, MN and before that, in Topeka KS. The original company was founded in the late 1930's by Mr. Dory Neale.

Their history in lashers goes back to their early patents in 1942 when Mr. Neale has the first ever patent on a cable spinner. That was for the one-man spinner shown in the photograph to the right. From those days onward, there have been several other patents and many innovative improvements.



MODEL Q LASHER

61100 SERIES

The Model Q hand-type Lasher is made for short span jobs like splicing or repair, traffic light installation, control cables, aerial inserts for underground construction or any job that would be simpler with a hand-held, variable tension lasher.

The Q Lasher adjusts easily according to how you wrap the wire around the tension rollers and is compatible with either .045" or .061" S-type lashing wire.

The rugged body is of cast aluminum with a removable flange for easy loading. Wire tension rollers are of hardened, tool steel.



Part No.	Max Strand	Max Lash	Wire Size	Spool Size	Overall Dimensions	Weight
61100-000	1/2"	1-15/16" DIA.	.045" - .061"	225 OR 375 FT/COIL	9-1/2" X 5" X 3"	2 LB


EAGLE LASHER

61700 SERIES

The Eagle Lasher was designed and built to meet the requirements of modern cable lashing jobs. Sized to install CATV or fiber optic cables, it's lightweight, durable and simple. Since its introduction, the design has proven itself on the strand, from the Arctic Circle to Asia Minor.

With a bundle capacity of 2-1/4" or single cable up to 2", the Eagle lasher will single- or double-lash most Last Mile or FTTH installations. Careful material selection and precise CNC machining have trimmed the weight of the machine to just 25lbs - significantly less than other lashers of this size range. The Eagle lasher also now uses a wire quick release trigger, mounted below the handle, for easy, one-hand engagement and release for continuous lashing and quick transfer time around poles.

Like all the DCD lashers, the Eagle does not need traction from the strand; it uses the tension from the lashing wire to drive rotation. This lasher uses industry standard straight-hub wire spools that are loaded into a pair of drop down magazine for added convenience. The lasher will also work with standard stainless lashing or non-metallic lashing wire.

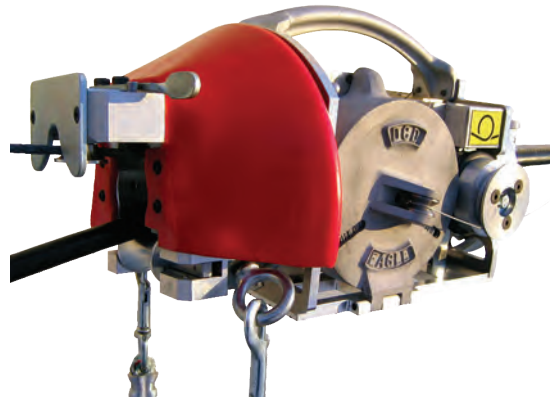

Part No.	Max Strand	Max Lash	Wire Size	Spool Size	Overall Dimensions	Weight
61700-000	3/8"	2-1/4" DIA.	.038" - .045"	1,200 FT/COIL	18" X 18" X 8"	24 LB