

Easy To Handle
 Levels Itself, Strapping Optional
 24" Model Weighs 40% Less
 Than Lightest Aluminum Model



Cable Guard (Patent Pending)	Eliminates Delays Caused By Cable And Pull Tape Derailing, 2" Wide Opening Allows Pulling Grips To Pass Through Easily
Retracting Spring-Loaded Cable Guard	Easy Unloading of Cable
Lift Hoist Swivels 360° Rotates 180°	For Unrestricted Mounting And Maneuverability
Lightweight, Reinforced Polymer Frame And Wheel Weighs Significantly Less Than Aluminum And Steel Models	Lighter Weight Reduces Installation Fatigue, Improving Operational Safety
Easy Latching Mechanism	Safe, Single-Handed Locking And Unlocking of Latch
High Strength, Impact Resistant Frame / Wheel	More Durable Than Aluminum
Chemical, UV, Corrosion Resistant Construction	Longer Life
Electrically Insulated*	For Safety




SHV-8	8" Fiber Install Sheave
SHV-24	24" Fiber Install Sheave
SHV-HK	Slip Hook Accessory
SHV-SS	Safety Shackle Accessory



8" Model For Straight Pulls
 24" Model For Set Up, Take Down And Turns



Hook and Shackle Accessories

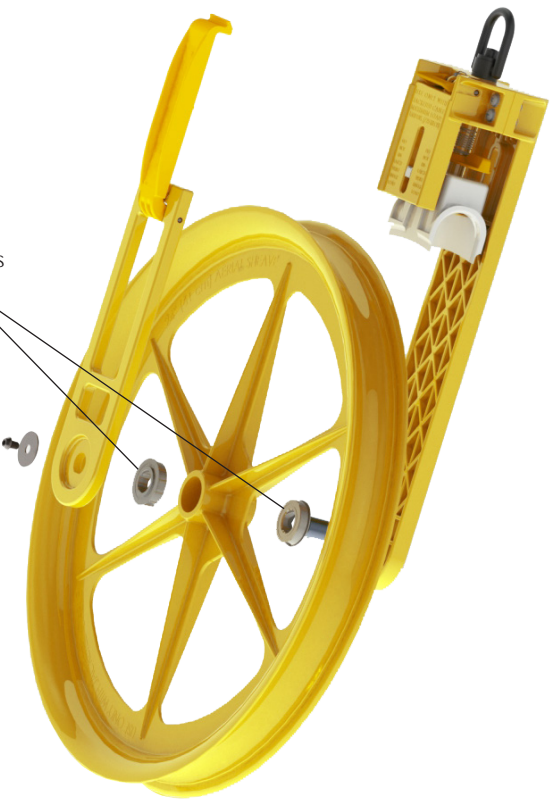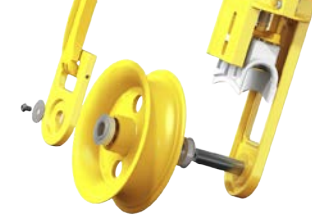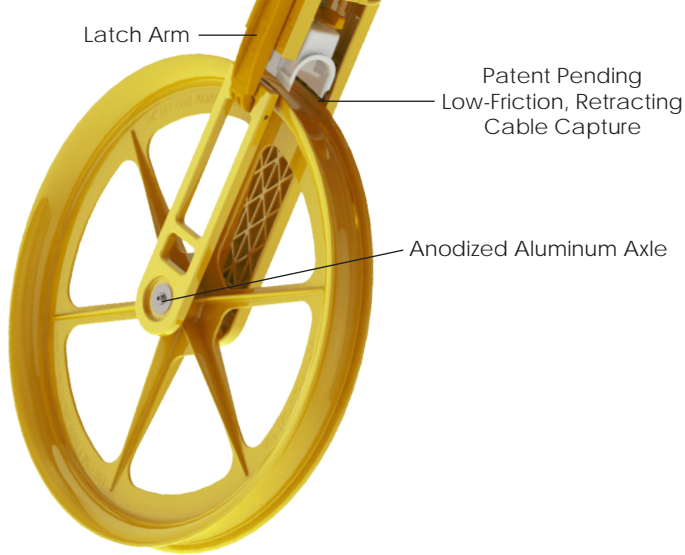

Specifications

* 100 KV/Ft Dielectric Withstand
Stainless Steel Fasteners

24" Aerial Sheave:
Weight: 14 lbs. (6.35 kgs)
Maximum Load Rated for 1,600 lbs.

8" Aerial Sheave:
Weight: 8 lbs (3.63kgs)
Maximum Load Rated for 1,600 lbs.

