

Audio Fiber Cable Detector

AFD600

- ♦ Help to find the target fiber cable easily
- Display the changes of waveform after cable found
- ◆ Listen fiber cable mechanical disturbance
- Easy to operate for beginners and experts
- Widely application, based on most telecom user's actual needs




AFD600-A



AFD600-B







- 1 Anti-dust cover
- 2 LCD
- 3 Power button
- 4 DC Socket
- 5 Battery cover
- 6 Headphones
- 7 Fiber Connector













APPLICATION


STEP1

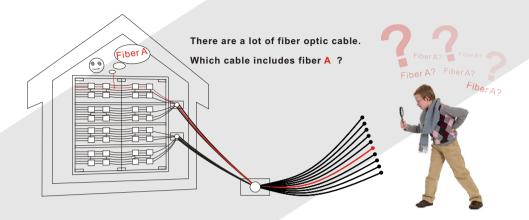

STEP2

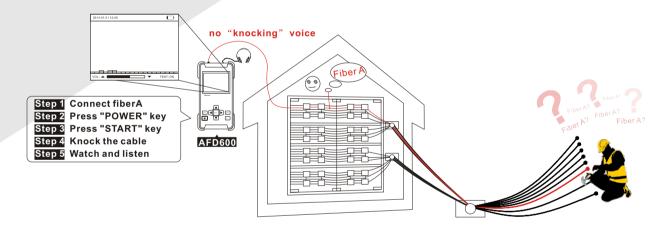

STEP3

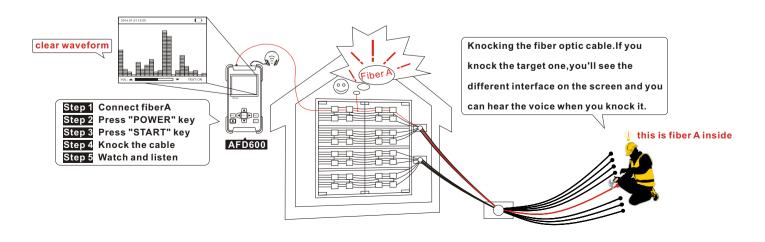



SPECIFICATIONS

Model	AFD600-A	AFD600-B
Dynamic Range	10dB	18dB
Application Fiber	SM	
Wavelength	1550nm	
Display	3.5 inch TFT color LCD	
Laser Power	0-3dbm	
Earphone Port	3.5mm	
Optical Reflector	Return loss<2dB FC/PC connector	
Power	Built-in rechargeable battery	
Working Time	>8 hrs	

GENERAL SPECIFICATIONS

Size(H*W*D)	197mm*107mm*67mm
Weight	0.75kg
Storage Temperature	-20 +60 ℃, < 90%RH
 Operating Temperature	-10 +50 ℃, < 90%RH

ACCESSORIES

Standard













Manual

Calibration certificate

Carrying bag

AC/DC adapter

Headphones

Fiber reflector (only for AFD600-B)