

Optical Power Meter

EPM30

- ◆ FC, SC, ST adapters and 2.5mm UPP
- ◆ 850/1300/1310/1490/1550/1625nm
- ◆ Built in VFL (optional)
- ◆ Data storage
- ◆ Energy save mode
- ◆ Reference value storage
- ◆ Power autonomy of 100 hours
- ◆ One-year warranty and Three-year recommended calibration interval



Standard



Carrying bag



Calibration certificate



Manual



Packing box

Optional



FC adapter



SC adapter



ST adapter



FC male to LC female adapter



AC/DC adapter



NEXT-Generation
Network Measurement



ISO9001



ISO14001:2015

SPECIFICATIONS


Model	EPM30T	EPM30C
Display Range	1310/1490/1550/1625: +10 ~ -70dBm 850/1300: +10 ~ -60dBm	1310/1490/1550/1625: +26 ~ -50dBm 850/1300: +26 ~ -40dBm
Accuracy *	± 0.2 dB	
Calibrated Wavelengths	850nm / 1300nm / 1310nm / 1490nm / 1550nm / 1625nm	
Resolution	0.01dB	
Connector	FC & 2.5mm UPP (option: SC, ST)	
REF	Yes	
Auto Power Off	No operation in 10 minutes (can be canceled), Low battery energy	
Wave ID (Optional)	Yes	
Build in VFL (Optional)	1mW or 10mW or customize	
Data Storage	40 traces	
Battery Charge	Yes	
Battery Life	Above 100 hours	
Power Supply	AA * 3 batteries or AC/DC power supply adapter	

* at 20±3°C, CW, with FC connector, -10dBm

GENERAL SPECIFICATIONS

Size(H*W*D)	190mm * 90mm * 40mm
Weight	About 400g
Storage Temperature	-20 -- +60 °C, < 90%RH
Operating Temperature	-10 -- +50 °C, < 90%RH

ORDERING INFORMATION

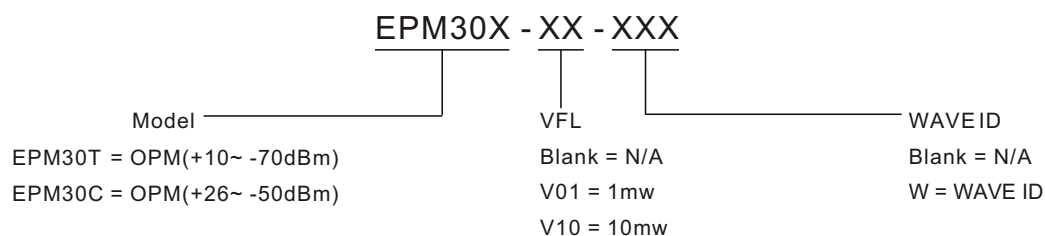

Example: EPM30T-V01, EPM30T-W