


**SPECIALTY**

# CORRUGATED PLENUM

- Plenum rated fire retardant corrugated duct
- Flexible, lightweight and easier to install than metal conduit
- Designed to protect existing cables and facilitate future cable installation or replacement
- When tested to UL2024/UL910, FIREJACKET® & DURATHANE® are low-smoke producing and fire resistant as defined by the National Fire Protection Association when rating cables as suitable for use in ducts, plenum spaces

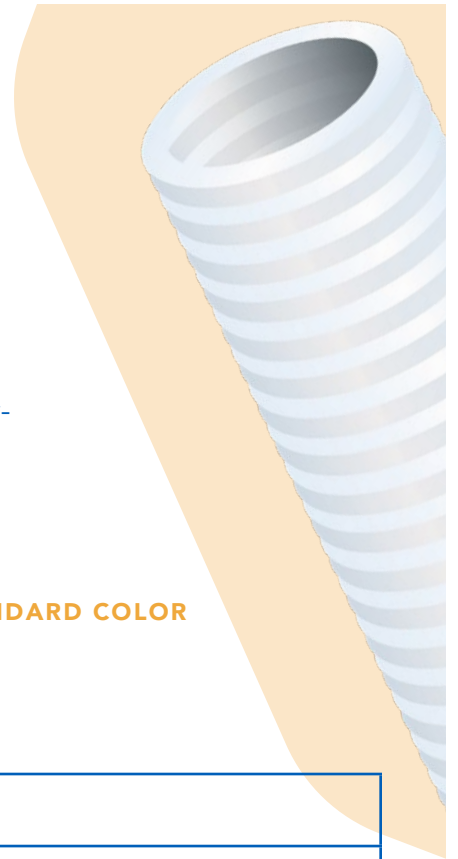

**INSTALLATION TYPES**

Interior Plenum Applications

**SIZE RANGE AVAILABLE**

1.0"  
1.25"  
1.5"

**STANDARD COLOR**



FEATURES

<b>STANDARD</b>
<b>FOOTAGE MARKINGS</b> Sequential foot or meter markings. Custom print streams available
<b>PLENUM</b> Listed to UL Standards 2024, ideally suited for plenum applications
<b>OPTIONS</b>
<b>PREINSTALLED TAPE</b> Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™, ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.

**CORRUGATED PLENUM TECHNICAL SPECIFICATIONS**

SIZE	NOM OD TOL (IN)	AVG ID	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
1"	1.385±0.020	1.165	0.125	22	44	500
1.25"	1.570±0.020	1.35	0.13	22	44	500
1.5"	1.824±0.020	1.60	0.149	22	44	500

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.  
† Safe working pull strength (SWPS) is calculated at 80% of tensile or breaking strength